

Smart Talky

License Free Walky Talky

Approved by W.P.C, Govt of India


Equipment Type Approval No:ETA-SD-20190702350



| | | |
|---------------|---------------|-------------|
| | Squelch noise | |
| High power | | Scan |
| | Low power | |
| CH with CTCSS | | CH with DCS |

Smart Talky

- LED display
- 99 Channels
- Very Long Range
- High Capacity Battery
- Menu Display Mode
- Low battery strength display
- Channel Number/Name display

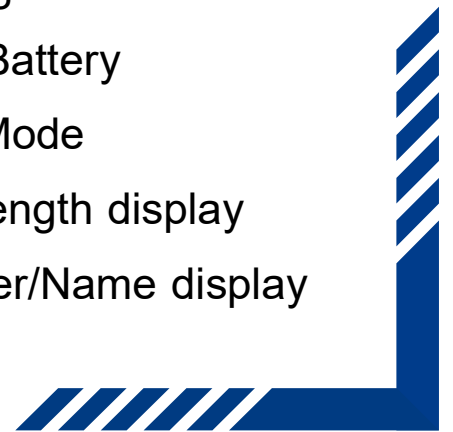

General specification

| Name | Smart Talky PMR 446 MHz Device |
|---------------------|---------------------------------|
| Model | Smart Talky |
| Frequency | UHF |
| Channel capacity | 99 |
| Frequency band | 446-446.2 MHz |
| Weight | 220 gms with Battery |
| Dimension | 100 X 57 X 35 mm |
| Rated voltage | DC: 7.4V |
| Temperature range | -20°C ~ ±60°C |
| Battery Capacity | 2000 mAh Battery (BIS Approved) |
| Battery Type | Li-ion Battery |
| Rx Sensitivity | 0.18uV |
| Selectivity | ≥ 60dB |
| Audio Power | ≥ 1W |
| Modulation Emission | 11KOF3E (12.5KHz) |
| Frequency Stability | ± 1.5 PPM |
| Tx Power Output | 0.5 W |
| Water Resistant | Meets IP55 Standards |
| Rugged Construction | Meets MIL STD 810 |

- **VOX (Voice Operated Transmission)**
- **107 PL (Private Lines Codes)**
- **56 DPL (Digital Private Lines codes)**
- **Channels Scan with Call back**
- **Priority Scan with Call Back**
- **Time Out Timer with Pre Alert**
- **Voice Annunciation**
- **Busy Channel Lock Out**
- **Multiple Call Tones**
- **Call Alert Tone in Group**
- **Emergency Alert in Group**
- **Low Battery Alert**
- **Automatic/Manual Key Lock**
- **Auto Wakeup LED Display**
- **Battery Voltage Display**
- **Call Strength Indicator**
- **Battery Saver Circuit**

* Note: All Stated Specification are subject to change in our endeavour of continuous improvement.

Standard and Optional Accessories:

